

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 18 TOWNSHIP 17 RANGE 3

DATE: 7-11-02

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 9-25-99

IN. S.P.C. E ZONE NAD '83

NAME: 17031802

N: 519471.2336(m)

E: 51664.8074(m)

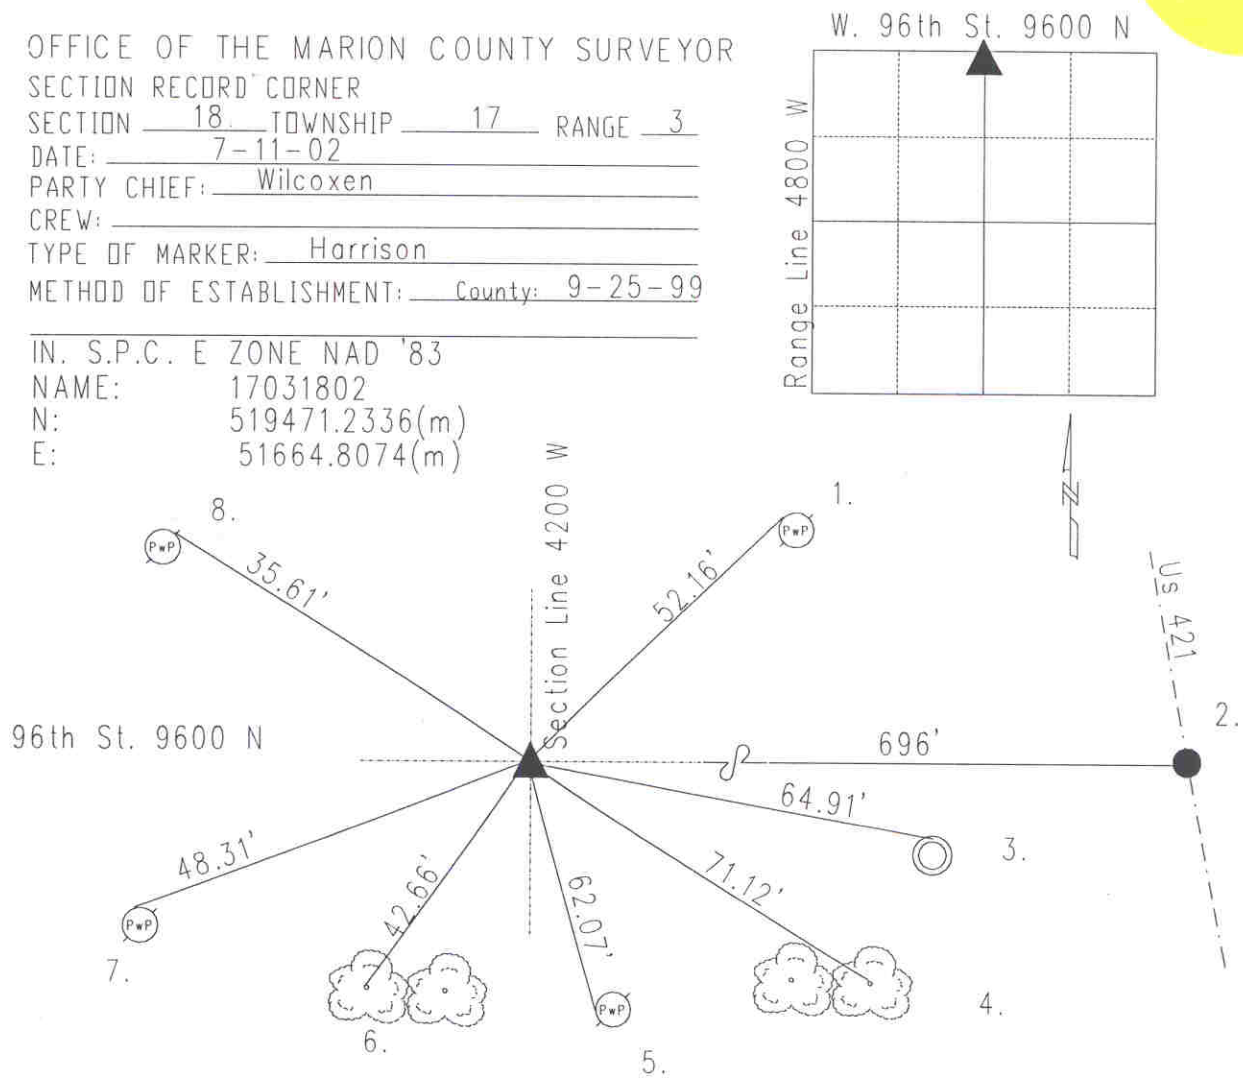

Original post set 1820 by Laughlin with witnesses: 10" beech N 67 W 14 links; 20" poplar S 43 E 10 links per Marion County Atlas pg. 8. Hosbrook 8-8-1851 called rock set with witness: 22" walnut S 14 E 75 links, 2" oak S 5 E 76 links, 36" red oak S 44 W 78 links per Pike Township Legal Survey Book pg. 33. Monroe at unknown date called nothing at surface. Miller 2-4-76 called a railroad spike. Green 8-9-93 called a PK nail. Excavated by Wilcoxon 6-20-95 called railroad spike found at surface. No stone found. Harrison set per ties '76 & '83. Re-tied 9-25-99 by Wilcoxon. Re-tied 7-11-02 by Wilcoxon. 17031802

REF.	DISTANCE	DESCRIPTION
1.	52.16'	Mag nail w/brass washer NW PwP#257-158 A 12"up
2.	696'	Due E to C/L of US421
3.	64.91'	Cut 'x' N-edge of telephone manhole rim
4.	71.12'	Mag nail w/brass washer N spur root twin sycamore tree
5.	62.07'	Mag nail w/brass washer W guide pole #152-158 B 12"up
6.	42.66'	Mag nail w/brass washer NW twin sycamore tree 12"up
7.	48.31'	Mag nail w/brass washer NW PwP#144-158 B 8"up
8.	35.61'	PK nail NE PwP#8-158 A 24"up